



Elastic slab 1000 x 1000 x 45 mm





ELASTIC SLAB 45

1000 x 1000 x 45 mm | Item-No. 1035451xx

 $1000 \times 1000 \times 45$ Terrasoft Slabs are made of pure rubber granulate (1-3.5 mm) and are bound and coated with polyurethane. Due to the greater thickness and the drainage arrangement on the underside of the slab they are particularly resilient and permeable to water. The slab cushions easily when you walk on it, which brings numerous orthopaedic benefits. In addition to a pleasant walking feeling, the joints are spared.

The 45 mm thick slabs are more insulating, which no only provides stability but also creates a pleasantly warm floor in stables. Can be laid on all substrates.



ADVANTAGES

- cost-effective
- permeable
- patented connection system with cross connector
- very soft

APPLICATION

- Boxes
- Washing areas

NOTES

- selective glueing between
 Elastic slab and cross connector recommend
- Laying on firm and permeable substrates
- Laying in cross-joint or halfoffset formation possible
- Please follow our detailed installation instructions to prepare the substrate.

ELASTIC SLAB 45


1000 x 1000 x 45 mm | Item-No. 1035451xx

INSTALLATION INSTRUCTIONS

In order to achieve the greatest possible installation stability, it is recommended to lay the flooring staggered

Dimensional tolerances may occur due to production. These will be compensated within 48 hours after installation. Please note that the final row in the installation plan will only be cut to the required size after the above-mentioned 48 hours have elapsed.

In order to ensure a permanent connection between the slabs when laying in a cross-gap, and to avoid a shifting of the slabs between them, we recommend the use of the cross connector for stilum Slabs $1000 \times 1000 \times 45$. They are laid below the slabs in the corresponding recess and glued selectively

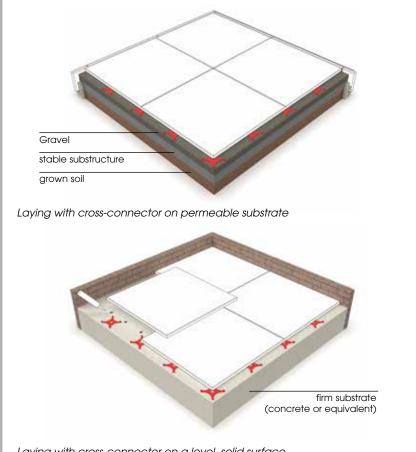

Laying with cross-connector on a level, solid surface