



Elastic slab
1000 x 1500 x 45 mm



ELASTIC SLAB

1000 x 1500 x 45 mm | Item-No. 1938451x1

Heavily strained areas in equestrian facilities can be durably paved with the elastic slab sized 1000 by 1500 by 45 mm. The large format provides a high degree of position stability, preventing displacement of the individual slabs even without connecting clips. Bonding here and there, however, is recommended.

Also as higher compressed slab available.

ELASTIC SLAB

1000 x 1500 x 45 mm | Item-No. 1938451x1

ADVANTAGES

- permable
- Largest slab in the product line:
Quick laying and high degree
of position stability due to heavy
net weight.

APPLICATION

- Boxes
- Pathways
- Washing areas

NOTES

- Laying on firm substrates recommended
- Laying in half-offset formation
- Please follow our detailed installation instructions to prepare the substrate.


Elastic slabs are generally to be laid in half-offset formation.

Dimensional tolerances may occur due to production. These will be compensated within 48 hours after installation. Please note that the final row in the installation plan will only be cut to the required size after the above-mentioned 48 hours have elapsed.

Laying on firm substrate:

When laying on solid surfaces, elastic slabs are glued to the substrate (selective glueing on the raised parts of the drainage).

Please follow the care instructions

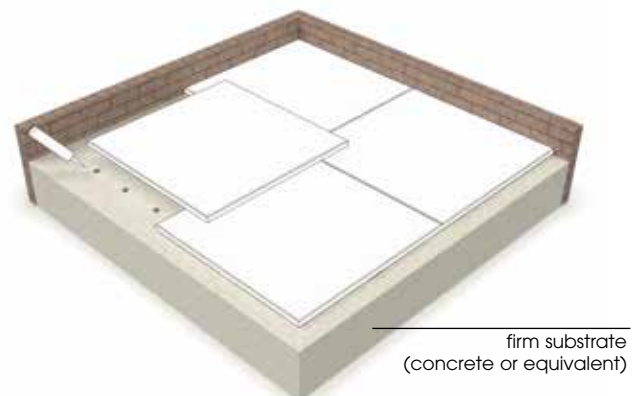

Laying on a level, solid surface