

DATA SHEET SLACKLINE LIXUS TRIANGLE

Text for invitation to tender | Item No: 51 6510 404



MATERIALS | SCOPE OF SUPPLY

Balance equipment, final installation on site



Tubular frame:	stainless steel, V2A, 3 pieces
Base plate:	steel covered with EPDM granules, 3 pieces
Handles:	stainless steel, V2A, with an element made of EPDM caout- schouc and tube end cap made of stainless steel, 3 pieces
Slackline:	Herkules rope/plastic, 3 pieces
Foundation anchor:	galvanized steel, 3 pieces

TECHNICAL INFORMATION

Dimensions:

Main dimension:	5600 x 4925 mm
Height:	1700 mm
Weight:	200 kg
Capacity:	acc. to normative requirements max. 3x60 kg
Dimension largest piece:	Ø600x2150 mm
Heaviest piece:	54 kg

Max. fall height:	350 mm
Impact area:	49,10 m ²
Required safety slabs:	54,00 m ²
Required lawn grating:	56,00 m ²
Recommended surface material:	optional The ground must be smooth and free of edges.

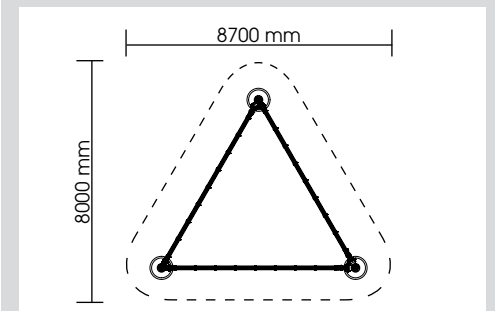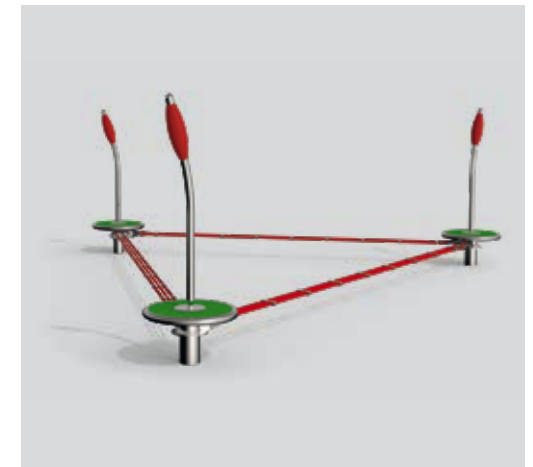

INSTALLATION

Foundations: 3
Modified installation depth possible
(special edition)

Installation according to our detailed mounting
instructions, see www.stilum.com

